

Indoor Wide band Omni Antenna , coverage 617MHz - 6000MHz



Electrical Specifications

Item No.	ZD617-6000H06i360A						
Frequency Range	MHz	617-806	806-960	1350-1550	1690-2700	3300-3800	4900-6000
Gain	dBi	1.5±0.5	2.2±0.5	3.5±0.5	4.5±1.0	6.0±1.0	6.0±1.0
Polarization		Linear					
VSWR		≤1.8	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
PIM, 3rd Order, 2 x 20 W,	dBc	≤-153					
Input Power, maximum	watts	50					
Impedance	ohm	50					

Mechanical Specification

Connector Type		N-female					
Size	mm	Φ220×18					
Antenna Weight	kg	0.3					
Mounting Kit		Ceiling, via hole (standard)					
Radome Material		ABS, White, RAL9003					
Operational Temperature	oC	-55~60					
Operational Humidity	%	< 95					

Radiation Pattern

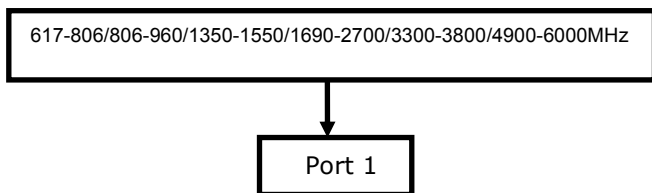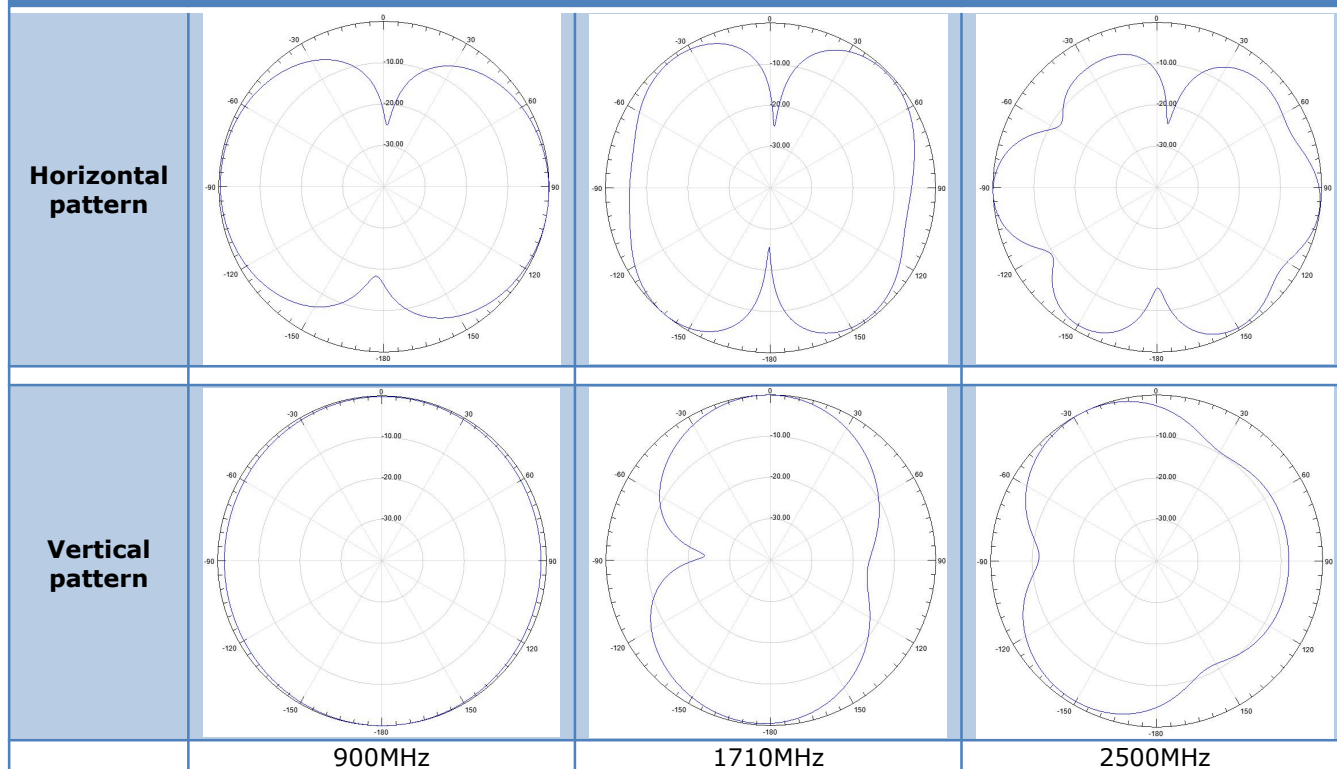



TELECOM

Making your Mobile Net "Work" Better

HEADQUARTERS

OFFICE: 15th floor, Rongchao Mansion, Longcheng Street, Longgang, Shenzhen, China

Tel: +86 755 8482 7256

E-mail: sales@zdtelecom.com

Web: www.ibscomponents.com
www.zdtelecom.com

HK OFFICE :
Flat/Rma, 9/f Silvercorp
International Tower, 707-713 Nathan Road,
Mongkok, Kowloon, Hongkong

MANUFACTURING RF:
No.3, Xinhua Road,
Shangsha Industrial Park,
Changan, Dongguan City, China

MANUFACTURING ANTENNA :
No. 5 Jinxiang Road,
Zhoubian Industrial Zone,
Sanshui District, Foshan City, China